

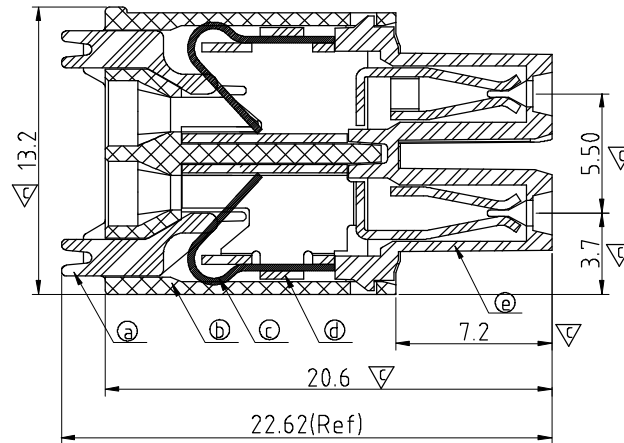
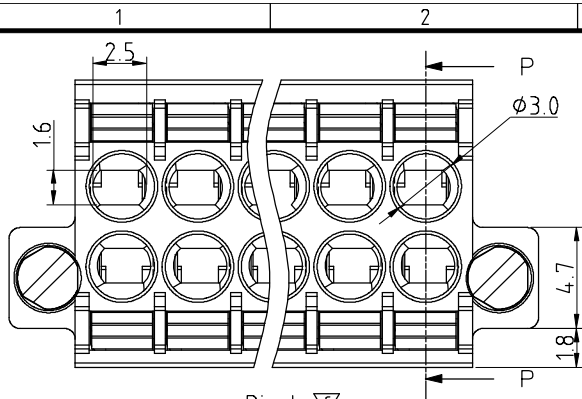


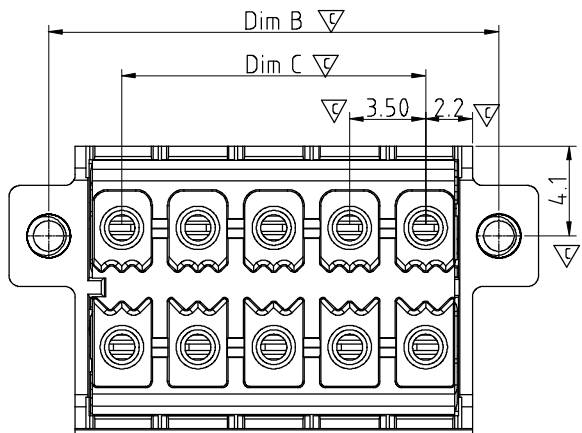

SECTION P-P

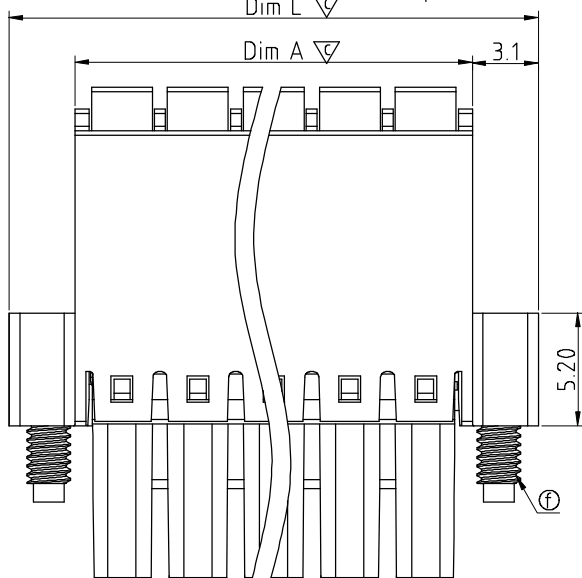

DimL=(N/2-1)×3.5+10.5
DimA=(N/2-1)×3.5+4.3
DimB=(N/2-1)×3.5+6.75
DimC=(N/2-1)×3.5

N=Number of poles

POLES	Dim. Tol	Dim.L/B	Dim.A/C
2x2p-2x6p		±0.15	±0.15
2x7p-2x12p		±0.25	±0.25
2x13p-2x16p		±0.30	±0.30
2x17p-2x24p		±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Electrical: cULus
- Voltage rating: 300 V
 - Current rating: 5.5 A
 - Wire range:
 - Solid wire(AWG): 16-24
 - Stranded wire(AWG): 16-24
 - Wire strip length: 9-10 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Critical dimension: ▽

NL xx 1 0 x 1 xxGx G		RoHS compliant (lead<4%)
No. OF POLES		In copper Alloy
04: 2x2 POLES		
06: 2x3 POLES		
48: 2x24 POLES		
	Body color	00G0: "@" Logo (Standard)
	0 Black (RAL9005)	00GA: "ANYTEK" Mark
	2 Red (RAL3001/D)	Any special item by customer request.
	3 Orange(RAL2011/P)	please contact sales department.
	4 Yellow(RAL1018/A)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green (RAL 6018/U)	

Material:

- Item ① Terminal lever: Thermoplastic (UL94V-0) Orange (RAL2011/P) halogen free
- Item ② Terminal top housing: Thermoplastic (UL94V-0) halogen free
- Item ③ Spring clamp : Stainless steel
- Item ④ Female contact : PhBz Tin Plated.
- Item ⑤ Terminal down housing: Thermoplastic (UL94V-0) halogen free
- Item ⑥ With flange screw: M2.0 Steel, Zinc plated.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NL 3.5mm With flange Series				DWG NO.	8NL0001	
PART NO.	NLxx10x1xxxxG				CUST NO.		
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Airy min 2015.03.05	Airy min 2015.03.05			UNIT: MM	X. ±0.50
						SCALE: NONE	X.X ±0.30
							X.XX ±0.10
							X° ±1°

SHEET: 01/01

REV.: B