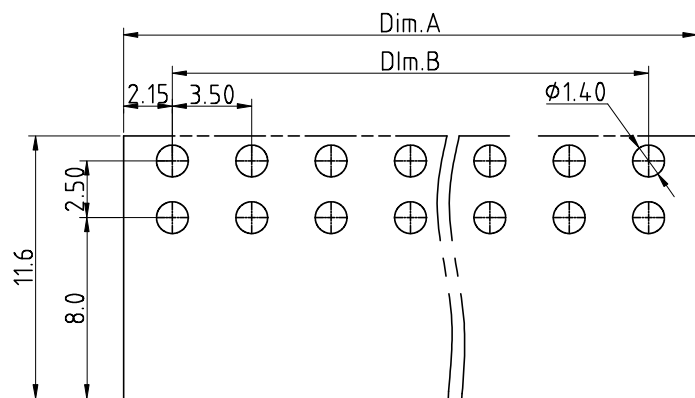
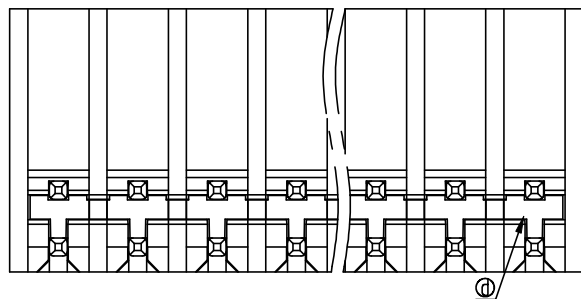
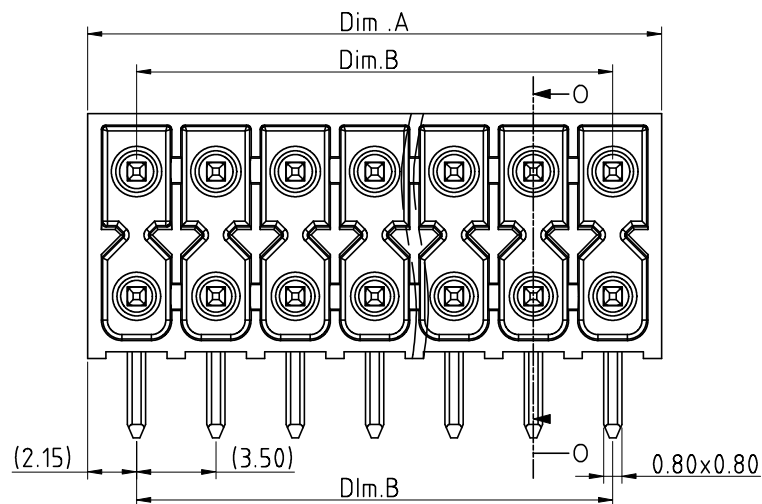
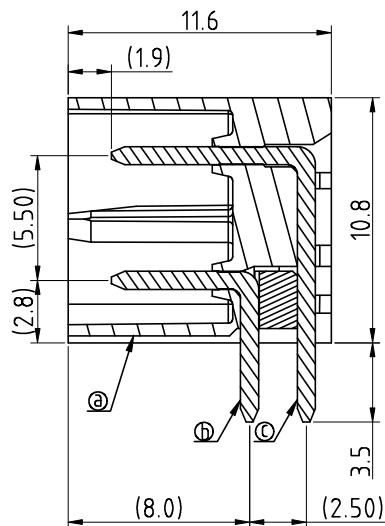


RoHS Compliant

P.C.B. Layout
Top view

SECTION 0-0

N=Number of contacts

Dim A	$(N/2-1) \times 3.5 + 4.3$
Dim B	$(N/2-1) \times 3.5$

POLES	Tol	Dim.	Dim.A/B
2x2p-2x6p			±0.15
2x7p-2x12p			±0.25
2x13p-2x20p			±0.30

REV	SIGN	DATE	DESCRIPTION	APPROVER
A1		03/13-19	按照模具需求修改產品拔模斜度，制工需求增大耳扣螺孔	zhangcan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ② Terminal housing:thermoplastic (UL94V-0)
- Item ③ Male contact short pin: Copper,Bright Tin plated over Nickel plated
- Item ④ Male contact long pin: Copper,Bright Tin plated over Nickel plated
- Item ⑤ cover plate:thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 150V
- Current rating: 5.5A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Critical dimension: ▲
- The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

NR xx 1 A x 1 xxxx G

No. OF POLES

04: 2x2 POLES

06: 2x3 POLES

:

:

40: 2x20 POLES

Color

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

9 White(RAL1102)

C Green(RAL6018/U)

RoHS compliant

(lead<4%)

In copper Alloy


0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by customer request. please contact sales department.

Amphenol
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NR 3.5mm B type 90° W/o Flange Series				
PART NO.	NRxx1Ax1xxxxG			DWG NO.	8NR0104	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		zhangcan 01/23-19	zhangcan 01/23-19		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
					SHEET: 01/01	REV.: A1