

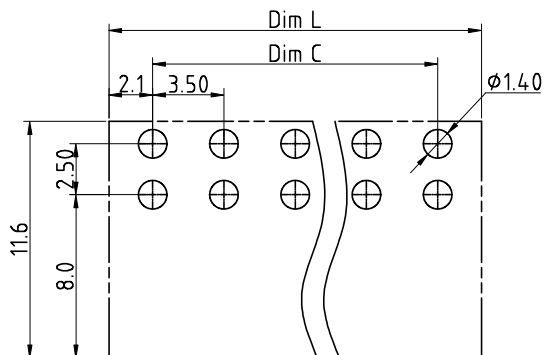
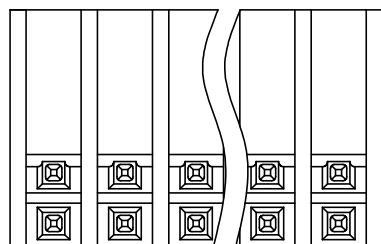


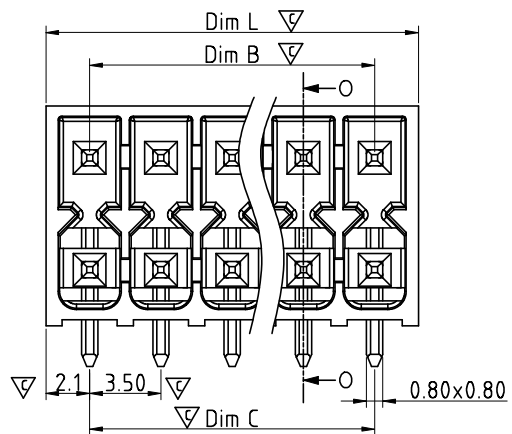

P.C.B. Layout
Top view

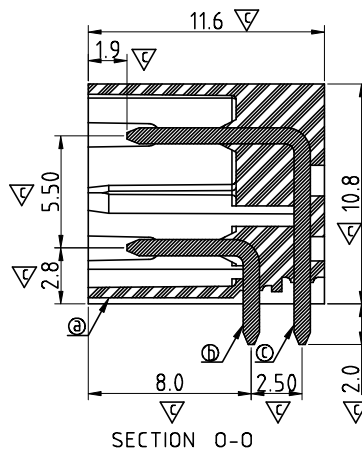

DimL=(N/2-1)×3.5+4.30	
DimB=(N/2-1)×3.5	
DimC=(N/2-1)×3.5	
N=Number of poles	
POLES	Dim. Tol.
2x2p-2x6p	±0.15
2x7p-2x12p	±0.25

SIGN	DATE	DESCRIPTION	APPROVER
△	2014.12.18	update drawing	
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing: LCP (UL94V-0) Halogen free
- Item ② Male contact short pin: Copper, Matte Tin
- Item ③ Male contact long pin: Copper, Matte Tin

Electrical: cULus

- Voltage rating: 150V
- Current rating: 5.5A
- Withstanding Voltage: 1.3KV △
- Operating temperature: -40°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec Max
- Safety Approval: cULus
- Critical dimension: △

NR xx 1 1 x 1 xxxx G

No. OF POLES
04: 2×2 POLES
06: 2×3 POLES
:
24: 2×12 POLES

COLOR
0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy

00G0: "@" Logo (Standard)
00GA: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NR 3.5mm 90° W/o Flange Series			
PART NO.	NRxx11x1xxxxG			DWG NO.	8NR0002
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Airy min 2014.12.18	Airy min 2014.12.18		
				Tolerance	
				X.	±0.50
				X.X	±0.30
				X.XX	±0.10
				X*	±1°

UNIT: mm
SCALE: NONE
SHEET: 01/01
REV.: B