

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item ③ Male contact pin: Copper Tin plated
- Item ⑥ Terminal(housing): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:   

cULus /VDE /TUV

OQ xx 5 4 x 0 x3xx G





No. OF POLES
02: 2 POLES
:
24: 24 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

G: Pb<4000ppm
0300: "@ " Logo (Standard)
030A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.

N = Number of poles
Dim A=Nx5.08+2
Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

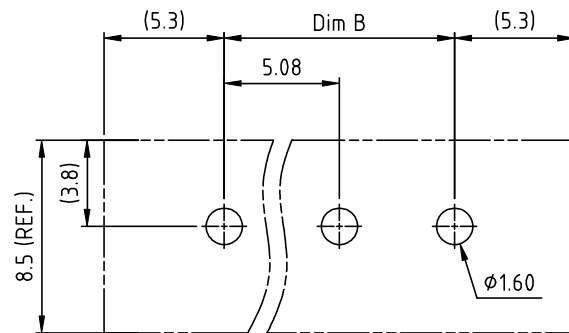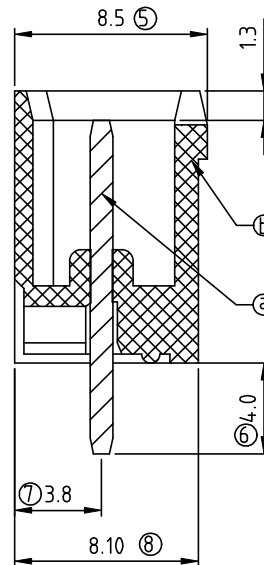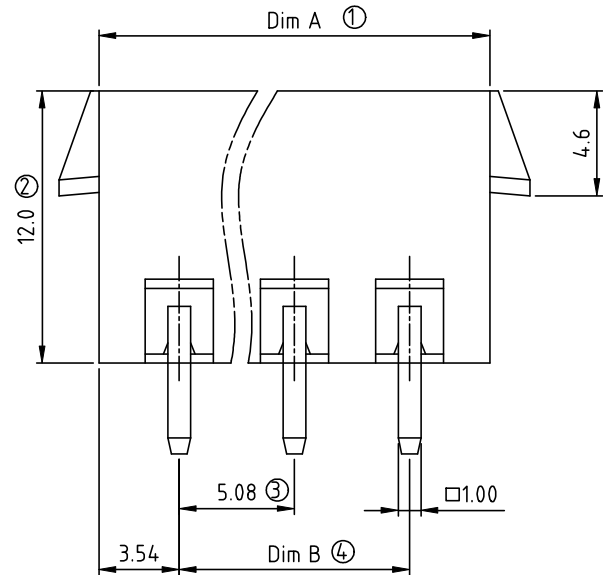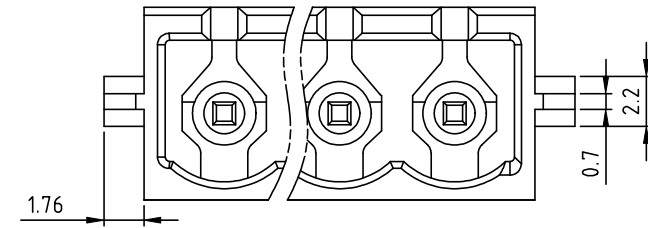

RECOMMENDED PCB LAYOUT

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OQ 5.08mm Vertical /Close Series 2p-24p(with latch holder)								
PART NO.	OQxx54x0x3xxG			DWG NO.	80Q07073				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Jacke 2010.07.15	Jacke 2010.07.15					UNIT: mm	
					SCALE: NONE		X.X	±0.30	
				SHEET: 01/01		REV.: B			
								X°	±1°