

SIGN	DATE	DESCRIPTION	APPROVER
△	01/20/07	The Soldering temperature from 245° to 250°	Aaron
△	2010.08.12	The design is changed	Chen Bo
△	2012.07.18	The tolerance are added	Runner
△	2015.09.29	Update the drawing	Airy min

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Lever: Thermoplastic (UL94V-0) Orange RAL2011/P
- Item ② Terminal body: Thermoplastic (UL94V-0)
- Item ③ cover: Thermoplastic (UL94V-0)
- Item ④ Spring clamp: Stainless steel
- Item ⑤ contact pin: Brass, Bright Tin plated over Nickel plated

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm²
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec △△
- Safety Approval: cULus VDE
- Critical dimension: ▽

HA xx 01 x 0 xxxx G

- △ 01 1 Poles
- 02 2 Poles
- 03 3 Poles
-
- 24 24 Poles

- △ Body color
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 5 Green(RAL6018/T)
- 8 Gray(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark




Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR, PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HA-5.08mm 180° series				DWG NO.		8HA0102	
PART NO.		HAxx01x0xxxxG				DWG NO.		8HA0102	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.					
		Airy min 2015.09.29	Airy min 2015.09.29		UNIT: mm		X.	±0.50	
					SCALE: NONE		X.X	±0.30	
					SHEET: 01/01		X.XX	±0.10	
					REV: H		X°	±1°	

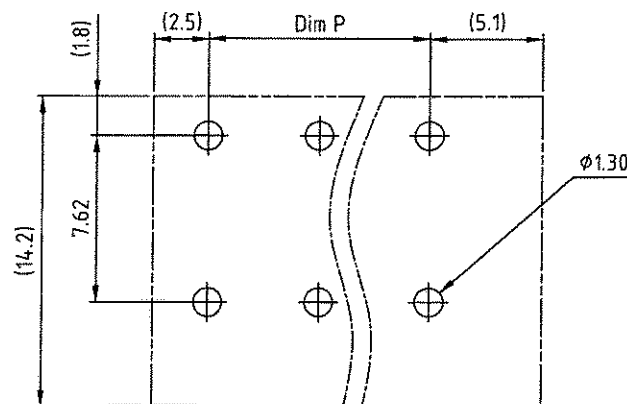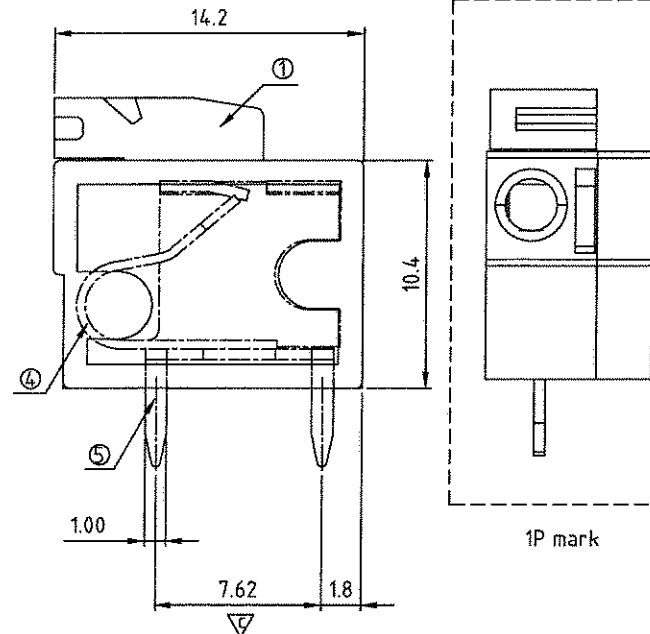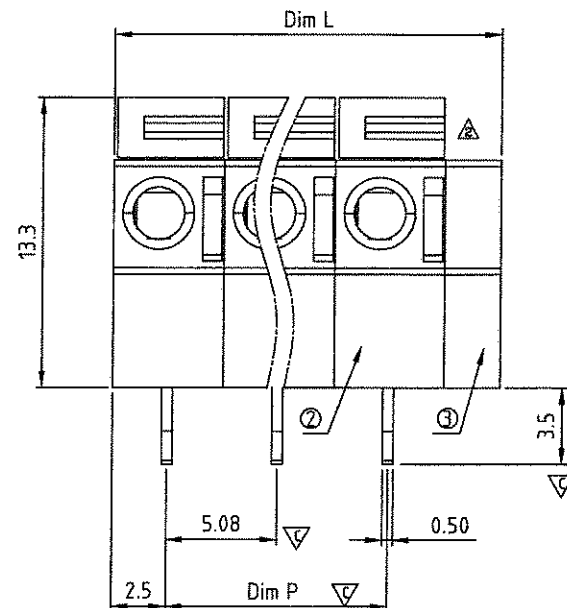

P.C.B. LAYOUT

△ N = Number of poles
Dim L=(N×5.08)+2.54
Dim P=(N-1)×5.08

Poles	Dim L	Dim P
1p	±0.10	
2-6p	±0.20	±0.20
7-12p	±0.25	±0.25
13-24p	±0.40	±0.40

