
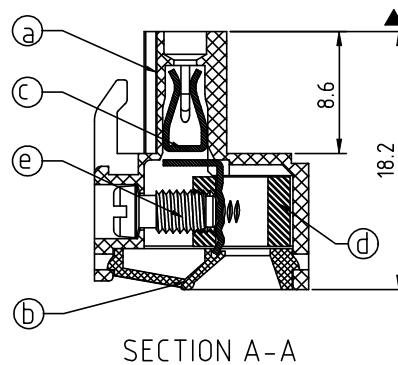
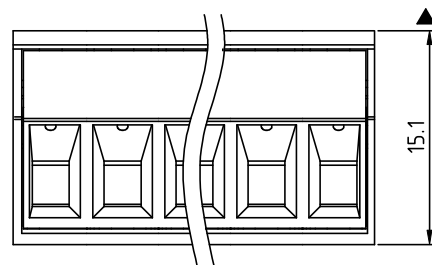
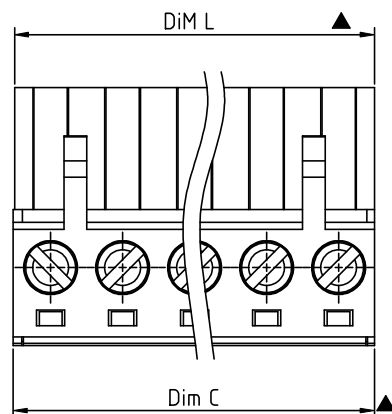
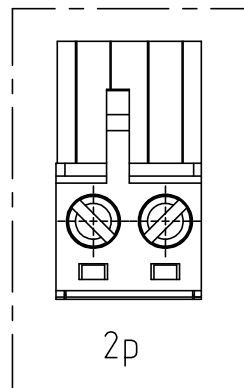


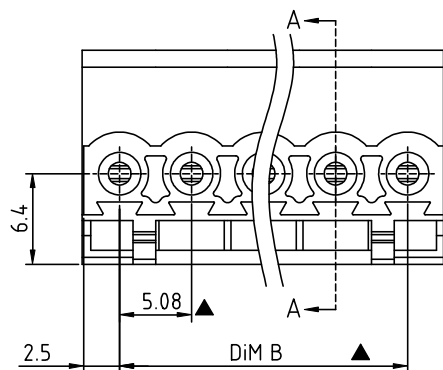

DIMENSION

Dim L	Nx5.08
Dim B	(N-1)x5.08
Dim C	Nx5.08+0.10

N= NUMBER OF CONCATS

Poles	Dim L/B/C Tolerance
2P-5P	±0.15
6P-10P	±0.20
11P-15P	±0.25
16P-20P	±0.30
21P-24P	±0.40

Material

- Item a Terminal body:Thermoplastic (UL94V-0)
- Item b Terminal cover:Thermoplastic (UL94V-0)
- Item c Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item d Clamp:Brass, Ni plated
- Item e Terminal screw:Steel Zinc plating "--" slot type

Electrical

cULus

- Voltage rating:300V
- Current rating:12A
- Solid wire(AWG):12-24
- Stranded wire(AWG):12-24
- Torque(Lb-In): 5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: ▲

TJ xx 51 x 6 xxxx G		
No. OF POLES	Color	G RoHS compliant (lead<4%) In copper Alloy
02: 2 POLES	0 Black (RAL9005)	0000: "@" Logo
	3 Orange(RAL2011/P)	000A: "ANYTEK" Mark
24: 24 POLES	4 Yellow(RAL1018/A)	Any special item by customer request.
	5 Green(RAL6018/T)	please contact sales department.
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ 5.08 Series Withou flange contact on up side					
PART NO.	TJxx51x6xxxxG			DWG NO.	8TJ0A01		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Chen Bo 04/12-21	Chen Bo 04/12-21		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X°	±1°
SHEET: 01/01		REV.: D					