

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "- " slot type
- Item c Female contact: PhBz, Bright Tin plated over Nickel plated
- Item d Terminal (housing): Thermoplastic (UL94V-0)
- Item e Terminal (cover): Thermoplastic (UL94V-0)
- Item f With flange screw: Steel Zinc plating M2.5"+/- " slot type

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 12A/20A/20A
- Wire range: 2.5mm²/0.34-2.5mm²
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval:   
- Critical dimension: 

TJ xx 71 x 2 xxxx G

No. OF POLES

02 2 CONTACTS

03 3 CONTACTS

... ..

24 24 CONTACTS

COLOR

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

9 White(RAL1102)

C Green(RAL6018/U)

G RoHS compliant
(lead<4%)


In copper Alloy

000 0 Standard @ Logo


000 A Standard ANY Logo

Any special item by
customer request,
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-5.00mm Series 2P-24P (With flange)							
PART NO.	TJxx71x2xxxxG			DWG NO.	8TJ0302			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	UNIT: mm/in SCALE: NONE SHEET: 01/01 REV: I		Tolerance	
		Chen Bo 04/12-21	Chen Bo 04/12-21				X. ±0.50	
							X.X ±0.30	
							X.XX ±0.10	
						X° ±1°		



2P

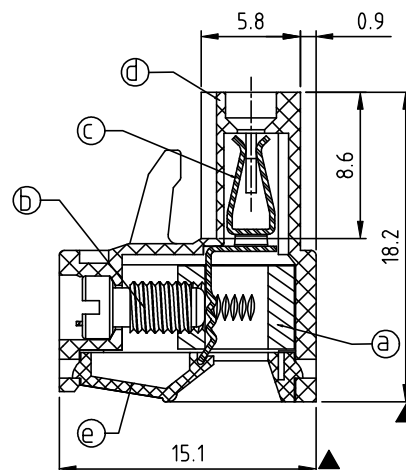


SECTION P-P

N= Number of poles

Dimension

Dimension	Poles	Dim L/B/C/D Tolerance
Dim L N×5.0	2P-7P	±0.15
Dim B (N-1)×5.0	8P-12P	±0.25
Dim C (N+2)×5.0	13P-18P	±0.30
Dim D (N+1)×5.0	19P-24P	±0.40

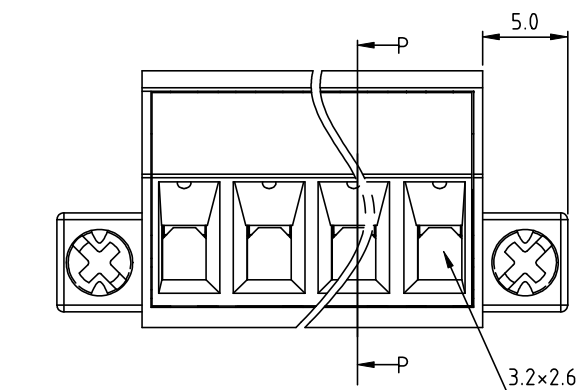

3.2×2.6