
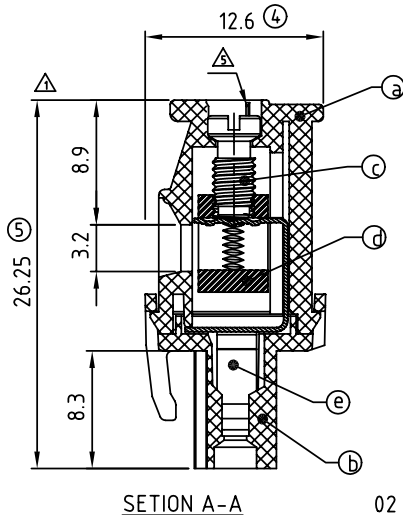

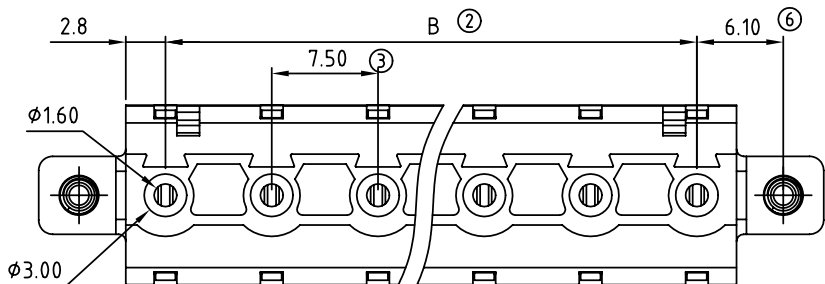
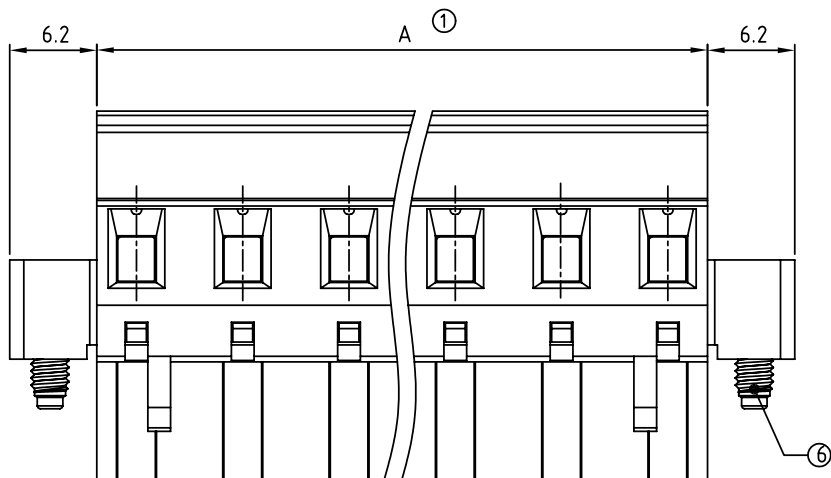


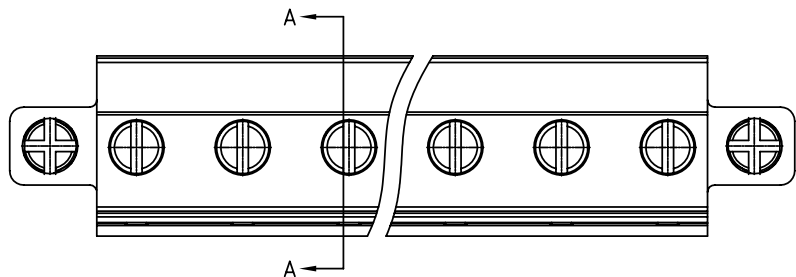

DimA=(N-1)×7.5+5.6  
DimB=(N-1)×7.5  
N=Number of contacts

| POLES   | DIM A | DIM B |
|---------|-------|-------|
| 2p-6p   | ±0.20 | ±0.20 |
| 7p-11p  | ±0.30 | ±0.30 |
| 12p-16p | ±0.40 | ±0.40 |

| SIGN | DATE       | DESCRIPTION                                                   | APPROVER |
|------|------------|---------------------------------------------------------------|----------|
| △    | 2008.6.19  | The dimension changed from 26.00mm to 26.25mm                 | Kind     |
| △    | 12/02'08   | With flange screw changed from"-"/"slot type to"+"/"slot type | Jacke    |
| △    | 2010.01.23 | The withstanding voltage is changed                           | Jacke    |
| △    | 2010.03.12 | Add the 2p mark                                               | Jacke    |
| △    | 2010.05.17 | The design is changed                                         | Jacke    |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!

### Material

- Item a Terminal body:Thermoplastic ( UL94V-0 )
  - Item b Terminal body:Thermoplastic ( UL94V-0 )
  - Item c Terminal screw:Steel Zinc plating "-"/" slot type
  - Item d Clamp:Brass, Ni plated
  - Item e Female contact:PhBz ( CuSn ) Tin plated
  - Item f With flange screw:Steel Zinc plating M2.5 "+"/" slot type
- Electrical cULus/TUV
- Voltage rating: 300VAC/750VAC
  - Current rating: 15A/15A
  - Wire range:0.2-2.5mm<sup>2</sup>
  - Solid wire(AWG): 12-24
  - Stranded wire(AWG): 12-24
  - Torque: 3.5 Lb-In 0.4Nm
  - Screw: M3
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.6KV/6KV
  - Operating temperature: -40°C to +115°C
  - Safety Approval: cULus TUV

TS xx A1 x C xxxx G

02 2 CONTACTS  
03 3 CONTACTS  
... ..  
16 16 CONTACTS

Color  
0 Black (RAL9005)  
2 Red (RAL3001/D)  
3 Orange(RAL2011/P)  
4 Yellow(RAL1018/A)  
5 Green(RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey(RAL7035/D)

0000 Standard @ Logo RoHS  
000A Standard ANY Logo Pb<40,000ppm  
Any special item by  
customer request,  
please contact sales  
department.

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|              |                                                      |                     |                     |                                                            |
|--------------|------------------------------------------------------|---------------------|---------------------|------------------------------------------------------------|
| TITLE        | TS 7.5 Series (2-16p) hook on entry side With flange |                     |                     |                                                            |
| PART NO.     | TSxxA1xCxxxxG                                        |                     |                     | DWG NO. 8TS0403                                            |
| APPROVED     | CHECKED                                              | DESIGNED            | DRAWN               | CUST NO.                                                   |
|              |                                                      | Jacke<br>2010.05.17 | Jacke<br>2010.01.23 |                                                            |
| SHEET: 01/01 |                                                      |                     |                     | UNIT: mm<br>SCALE: NONE<br>REV.: G                         |
|              |                                                      |                     |                     | Tolerance<br>X. ±0.50<br>X.X ±0.30<br>X.XX ±0.10<br>X° ±1° |